

# ZENITH ZENITH PANEL SYSTEM

Field houses, competition and multipurpose gymnasiums, collegiate, secondary schools and dance areas.

### PERFORMANCE

Meets or exceeds EN 1490-2006/PUR/FIBA

## PERFORMANCE CHARACTERISTICS

Shock Absorption	
Vertical Deflection	V
Area of Deflection	<b>V</b>
Ball Bounce	<b>V</b>
Surface Friction (Coefficient of Friction/Sliding Coefficient)	V
Rolling Load	<b>V</b>

#### **SPECIFICATIONS**

System Thickness\*/Pad Options

25/32" MFMA Horner Maple:

1 7/8" ECO pad

\*System thickness is equivalent to slab depression for new facilities.

## MATERIALS

Option: Specify Horner LongLife\* Maple
Subfloor: 2 layers 15/32" rated sheathing
Vapor retarder

## GREEN/LEED OPTIONS

FSC Maple Flooring MRc 7
FSC Subfloor Components MRc 7 Exemplary Performance

# INSTALLATION REFERENCES


Notre Dame Academy, Green Bay, WI Norway, Vulcan, MI Watertown, WI

Please contact us regarding our extended maintenance warranty options.

Horner Flooring Company's policy is to continuously improve its line of products.

Therefore, Horner Flooring Company reserves the right to change, modify or discontinue models, specifications and accessories of all products at any time without notice or obligation to any purchaser.



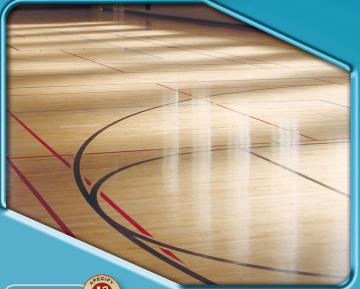

PECIFY

For extended wear life, choose *Long Life*<sup>TM</sup>. Horner's *Long Life*<sup>TM</sup> flooring is 25/32" northern hard maple with the same wear depth as 33/32" flooring. *Long Life*<sup>TM</sup> provides the ecological, cost savings and availability benefits of a 25/32" floor, with extended wear life. More re-sands, stronger system and economical. Why not value engineer?

HORNER FLOORING is the leading manufacturer of athletic flooring systems used in high-school gyms, college and professional arenas, and public and private training facilities.







HORNER FLOORING COMPANY, INC.

 $800.380.0119 \; / \; www.hornerflooring.com$ 

P.O. Box 380, 23400 Hellman Avenue, Dollar Bay, MI 49922 P: 906.482.1180 / F: 906.482.6115 / info@hornerflooring.com